


New Product Info Leaflet

The Double-Bridge Turbo-Sprinkler for Improved Wetting Ranges and Durability







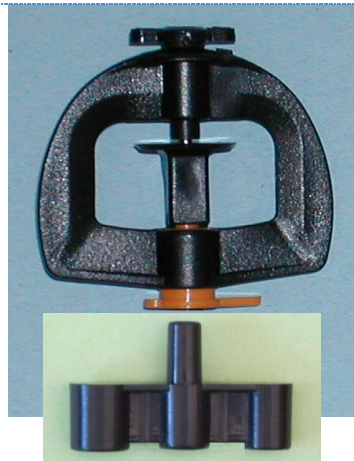






Ordinary model for UR* use, with a spike adapter for 8mm or 5mm rod.

UD* model for hanging sets, with a male-male coupler for anti-leak device.

- **Improved water spreading:** wetting diameter by 2m larger compared to our regular bridge mini sprinkler.
- **Better durability:** The double bridge shape provides better toughness.
- **Longer life span:** A nylon bearing cap reducing erosion of the swivel axis.
- **More nozzles:** Selection of 11 color coded flow rates.

Watering Performance – UR* Position 70cm over the ground

Nozzle color	Orifice [mm]	Flow Rate [L/H]	Wetting Dia. [m]	
	Light Blue	0.7	30	5.1
	Black	0.85	40	5.2
	Blue	1.0	50	5.4
	Dark Blue	1.1	65	6.0
	Green	1.2	75	7.2
	Red	1.4	100	7.5
	White	1.6	130	10.0
	Violet	1.8	175	10.5
	Yellow	2.0	200	11.5
	Brown	2.2	250	12.0
	Orange	2.4	300	12.4

UR* = Upright; UD* = Upside Down

Please visit our website: www.ein-tal.com

P.O.Box 151, Or-Akiva 30600, ISRAEL. Phone: 972 – 4- 6101811,3 . Fax: 972 – 4- 6101814