


Directional-Pattern Spreaders for Gardening



- Static deflectors in a Clean-Valve Bridge.
- Standard flow in all patterns is 90 L/H. Wetting range 1.8m.
- Complete irrigation stands on 40 cm spike with 40 cm PVC flexi-tube.
- Available with Male Bridge on 1/2" Threaded Nut, for rigid 1/2" raisers.

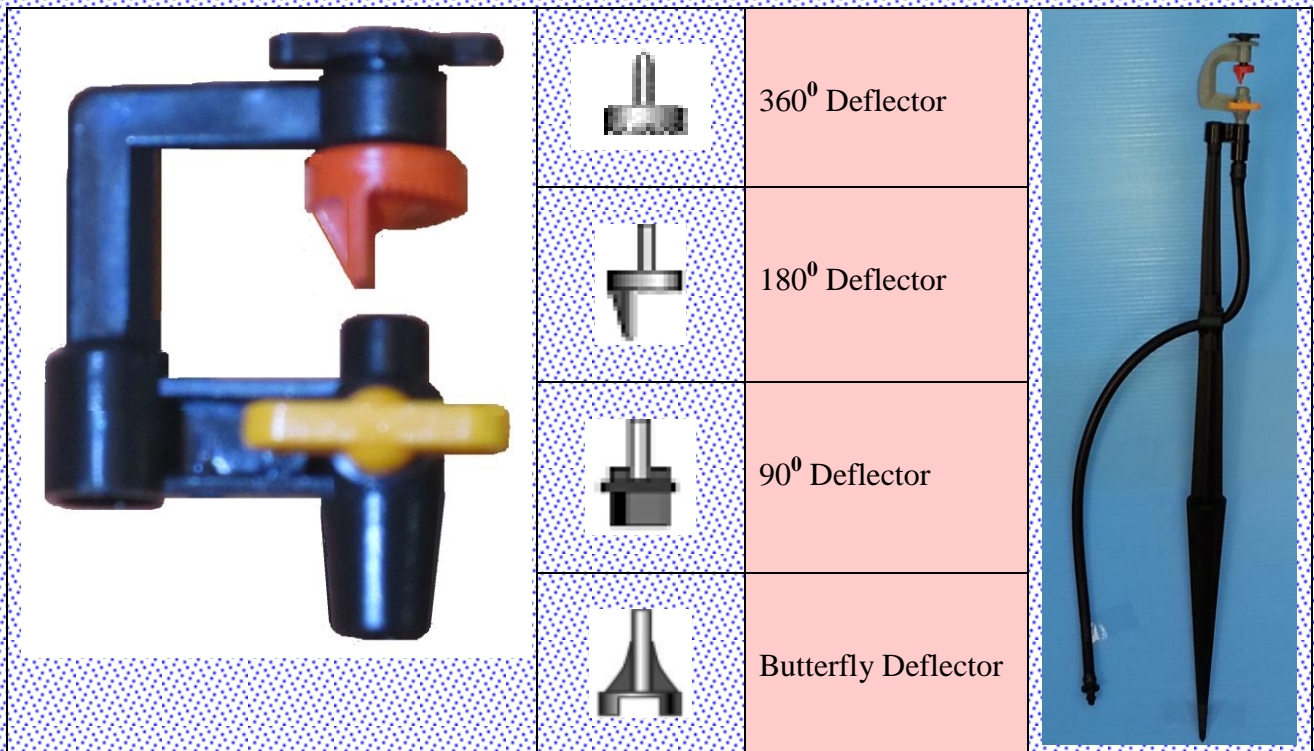